

A Stochastic Water Quality Forecasting System for the Yiluo River

H. C. Guo¹, L. Liu², G. H. Huang^{2*}

¹Center of Environmental Sciences, Key Laboratory for Water and Sediment Sciences, MOE, Peking University, Beijing 100871, China

²Environmental Systems Engineering Program, Faculty of Engineering, University of Regina, Regina, Sk S4S 0A2, Canada

ABSTRACT. A challenging problem for water quality management in northern Chinese rivers is their high loadings of organic pollutants and suspended solids, leading to complexities in producing effective water quality models. Also, uncertainties exist in many system parameters and their interrelationships. This study aims at developing a stochastic water-quality forecasting system and applying it to the Yiluo River, a tributary of the Yellow River with extremely high sediment and suspended-solid loadings. Extensive investigations of water quality in the river and the related pollution sources and watershed conditions were conducted. A one-dimensional BOD-DO model was developed to simulate water quality in the river, with interrelationships among water quality and the related source and sink conditions being explicated. A stochastic water-quality forecasting system was then developed to reflect random characteristics of many parameters, based on Kalman-filtering and self-adaptive techniques. The developed system was used for predicting DO and BOD levels in the Yiluo River. The results indicated that randomness in many system parameters and their interactions had been effectively handled; the accuracy of state estimation was generally satisfactory.

Keywords: Filter, forecast, Kalman, model, pollution, random, river, stochastic, uncertainty, water quality

1. Introduction

Water pollution in rivers and streams is acquiring more and more attention in China, along with its rapid economic development and population growth. Water pollution can lead to a variety of impacts on communities and ecosystems. Consequently, it is desired that effective water pollution control strategies with sound environmental and socio-economic efficiencies be identified. Water pollution could be related to a number of factors and processes, with multi-source, multi-stage, and multi-objective characteristics. Thus, when decisions regarding water quality management are to be made, an integrated consideration that incorporates these factors and processes within a general framework would be useful for effectively reflecting these complexities.

Previously, a number of river-water quality models have been developed for supporting waste-loading allocation, pollution control, and land-use planning in river basins (Orlob, 1992; McCutcheon, 1989). The first water quality model was developed by Streeter and Phelps (1925). The basic principles behind this model include (i) DO is supplied by reaeration and photosynthesis and demanded by respiration and BOD, and (ii) BOD is due to emissions from point and nonpoint sources and could be reduced by oxidation, sedimentation and absorption processes. After that, a number of further studies were undertaken (Thomas, 1948; Thackston & Krenkel, 1966; Di Toro & O'Connor, 1968; Young & Beck, 1974; Shastry et al., 1975;

Fillos & Swanson, 1975; Rinaldi & Soncini-Sessa, 1978; Belanger, 1980; Peavy et al., 1985). Various computer software packages were developed, such as DOSAG-I, HSPF, DIURNAL, RECEIV-II, RWQM, RIBAM, STREAM 7B, WQRRS, WASP, QUAL2E, and Mike11 (Brown & Barnwell, 1987; McCutcheon, 1989).

Typically, many processes associated with water pollution are uncertain in nature (Thomann, 1982; Hobbie & Tiwaris, 1978). These uncertainties could arise from a variety of causes, such as inherent variability and randomness in natural processes (e.g. hydrological conditions), errors from sampling and measurement processes (e.g. instrumental noise), modeling assumptions that are unrealistic, and lack of data for effective research works. For example, variations of flow velocity in a river due to random turbulence can cause dispersion of suspended particles and dissolved compounds to various directions. Although the majority of water quality models developed so far were deterministic, an increasing number of them considered uncertainties in recent years, such as methods of Monte Carlo simulation, Markov chain, Kalman filter, and Fokker-Planck equation (Loucks & Lynn, 1966; Shih, 1975; Beck & Young, 1976; Tiwaris et al., 1978; Finney et al., 1982; Dewey, 1984; Leduc et al., 1986; Ponnambalam & Curi, 1991). Finney et al. (1982) and Zielinsky (1989) used the Ito rule for determining the first- and second-order moment equations for a set of stochastic differential equations associated with water-quality models. Tung and Hathorn (1988) and Song and Brown (1990) used Taylor series to determine moment equations for a set of random differential

* Corresponding author: Gordon.huang@uregina.ca

equations in DO models. These stochastic methods improved upon deterministic ones through effective reflection of uncertainties that exist in many modeling components.

As an extension of the previous efforts, this study focuses on the development of a stochastic water-quality forecasting system for the Yiluo River, a tributary of the Yellow River with extremely high sediment and suspended-solid loadings. A modified Dobbins BOD-DO model is developed to simulate water quality in the river. Interrelationships among water quality and the related pollution sources and watershed conditions are analyzed. The developed model is calibrated through examination of historical data and implementation of specific field studies. A stochastic water-quality forecasting system is then developed based on Kalman-filtering and self-adaptive techniques (Kalman, 1960). Random characteristics of many system parameters and their interrelationships are taken into account through adding noise terms to modeling equations. The developed forecasting system is used for predicting DO and BOD levels in the Yiluo River. Historic data of river flow and water quality in dry-, wet- and level-seasons were used for parameter estimation and result verification.

2. Overview of the Study System

Investigation of the study river system was carried out through efforts of data collection, on-site environmental monitoring, database development, and laboratory analysis. A number of crucial factors, including hydrological and geological features, source distribution, pollutant emission and water quality, were examined. The results provided bases for further modeling studies.

2.1. Geographical and Hydrological Conditions

The Yiluo River is located in northern China. It is the largest tributary of the Yellow River in its lower reach, covering a watershed area of 18,881 km². It consists of three sections, including two upper branches [the Yihe Branch (YB) and the Luohe Branch (LB)] and one lower main stream (LMS) (Figure 1). Among them, YB has a length of 410 km, and LB extends for approximately 265 km. These two branches confluence at the Yanshi County. The LMS starts at the confluence of YB and LB and extends for approximately 37 km to reach the Yellow River. The study river section has a length of 62 km starting from the Xinqiao Bridge at the Luohe Branch down to the Town of Shihuiwu beside the LMS.

There are three hydrological monitoring stations in the study section, including the Baimasi Station for the Luohe Branch, the Longmen Station for the Yihe Branch, and the Heishiguan Station for the LMS (Figure 1). The yearly average flow rates for LB and LMS are 62 and 100 m³/s, respectively; and their annual runoff loadings are 1.943×10^9 and 3.154×10^9 m³, respectively. Runoff loadings within the study watershed have significant temporal variations, with their values in wet (July to October), dry (June and December to March) and level (April, May and November) seasons ac-

counting for 60%, 15% and 25%, respectively, of the annual total.

Since the Yiluo River is located at the North China Plain, it has characteristics of high solid loading, low slope (0.035%), and low velocity (0.3 to 0.6 m/s at the Baimashi Station, and 0.2 to 0.4 m/s at the Heishiguan Station). The average suspended-solid (SS) contents in water are 4.94, 3.21, and 1.93 kg/m³ at the Baimasi, Heshiguan, and Longmen Stations, respectively, leading to high sedimentation rates onto the river bed. The yearly average water temperatures are 14.1 °C at the Baimasi Station and 15.4 °C at the Heishiguan Station, with significant seasonal variations. The highest temperature occurs in July with a monthly average of 25.2 to 26.6 °C, while the lowest appears in January (monthly average = 2.1 to 2.5 °C).

2.2. Water Pollution Concerns

The Yiluo River Watershed contains the Luoyang City, the Yanshi County, and the Gong County, where many industries exist; also, several smaller towns and villages are close to the river. Municipal and industrial wastewater from these population centers is mostly discharged to the river, without even primary treatment, through 8 outlets as shown in Figure 1. Among these outlets, one is from a chemical fertilizer industry, two from pulp and paper plants, and the remaining from municipal and other industrial sources. The average BOD emission rate from all municipal and industrial sources was 20,500 kg/d, with the Luoyang City, the Gong County, and the Yanshi County contributing 47.1%, 38.7%, and 14.2%, respectively. Table 1 gives BOD concentrations and emission rates at the eight outlets.

Table 1. Average BOD Loadings from Eight Wastewater Discharge Outlets

Outlet	D1	D2	D3	D4	D5	D6	D7	D8
BOD (mg/L)	23.4	155.0	308.0	86.9	214.0	253.0	309.0	112.0
BOD (kg/d)	2822	3350	3437	1493	1411	2712	2279	2949

Note: D1 – Jianhe; D2 – Luoyang Pulp and Paper Plant; D3 – Chanhe; D4 – Yanshi Fertilizer Plant; D5 – Yuetan Pulp and Paper Plant; D6 – Huiguozheng; D7 – Ershilipu; D8 – Shihedao

To gain insight into variations of water quality along the river, 10 monitoring intersections were monitored (Figure 1). Among them, two were at the Baimasi and Heishiguan Hydrological Stations, and the others were close to the eight wastewater discharge outlets. Two monitoring programs (MP1 and MP2) were initiated for investigating hydraulic characteristics (e.g. flow, velocity, and depth), water quality (e.g. BOD, DO, COD, and temperature), and source strength (e.g. wastewater flow).

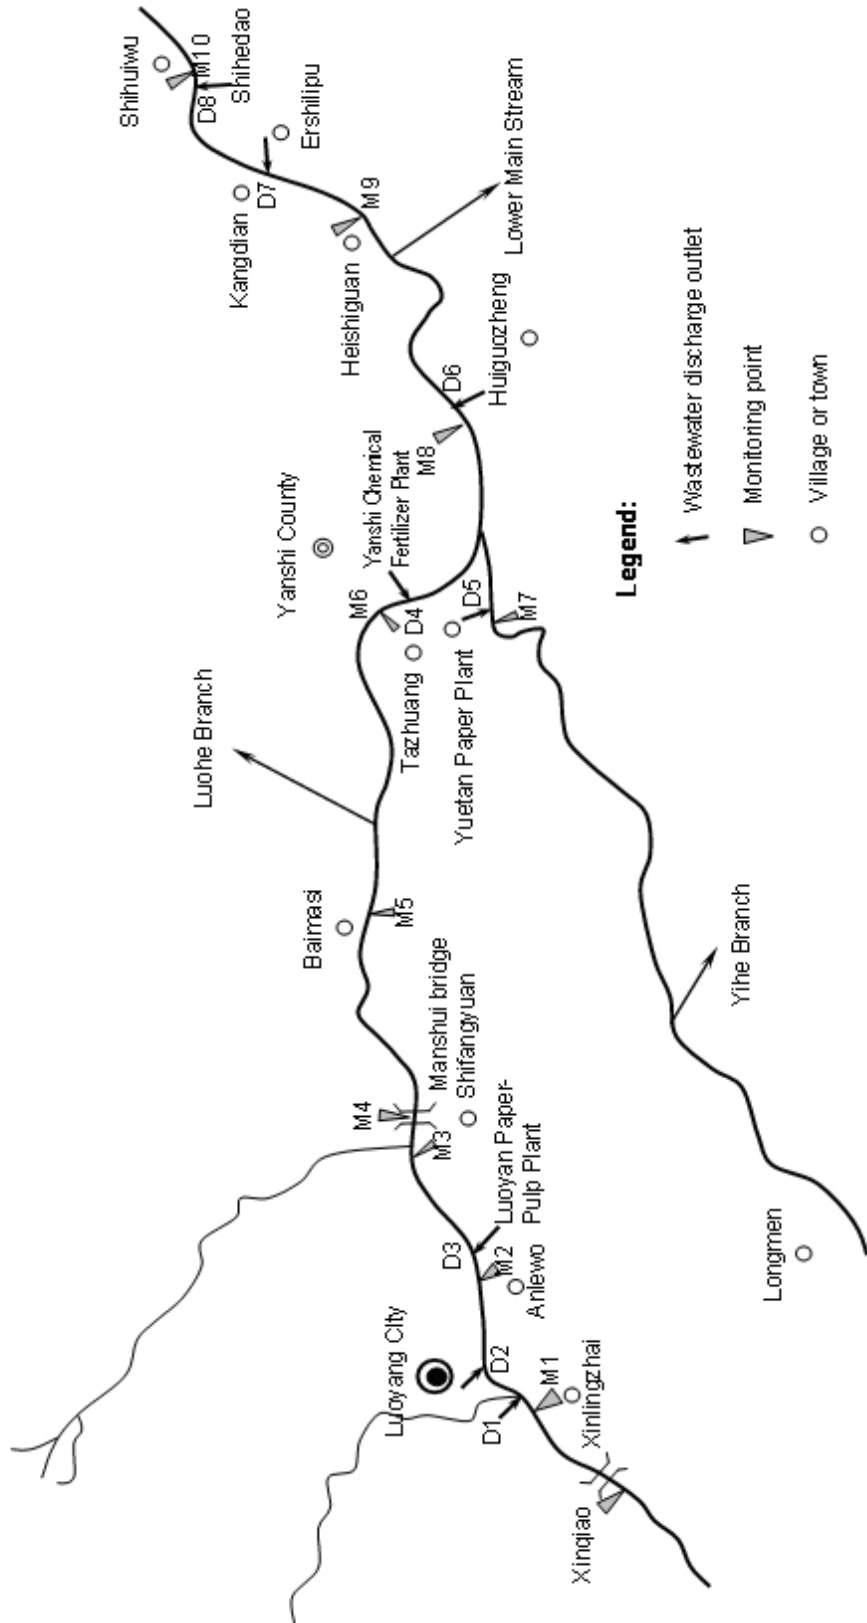


Figure 1. The Yiluo River.

(1) Spatial variations of water quality

Table 2 presents monitoring results of BOD and DO levels in different intersection. It is indicated that the BOD levels vary significantly along the river. BOD concentration at Station M1 is below 2.0 mg/L, indicating satisfactory water quality at the river's upstream. Three wastewater discharge outlets (i.e. D1, D2 and D3) were located in the Luoyang City (Figure 1); the total BOD loading from them is 9,645 kg/d, causing significant deterioration of water quality downstream. The highest BOD concentration was encountered at the Manshui Bridge (M4), with an average of 75.1 mg/L, where the DO dropped to zero. Since there was no additional wastewater discharge outlet between M4 and M5, water quality gradually improved due to natural attenuation. The average BOD concentration at Station M5 was reduced to 3.32 mg/L. The section between M5 and M9 received small amounts of wastewater from the Yanshi Chemical Fertilizer Plant and the Yuetan Paper-Pulp Plant (D4 and D5), where BOD levels fluctuated within a small range. However, a rapid increase of BOD level occurred in section M9 to M10 due to the discharge of over 5,000 kg/d of BOD from the Ershilipu and Shihedao. At M10, the maximum BOD concentration reached 23.9/L. Figure 2 presents the variations of BOD concentrations along the river.

Table 2. BOD Concentrations (Mg/L) and DO Saturation Levels (%) at Nine Monitoring Stations

Station	Average		Maximum		Minimum	
	BOD	DO	BOD	DO	BOD	DO
M1	1.59	91.6	2.55	130.0	0.39	72.8
M2	3.03	82.4	7.89	99.0	0.90	61.0
M3	6.15	76.7	15.60	103.0	1.64	43.0
M4	18.99	53.4	75.10	95.9	1.35	0
M5	3.32	81.6	11.20	178.0	0.79	17.6
M6	3.65	94.0	17.40	253.0	0.67	54.1
M8	2.75	85.5	6.11	127.0	1.38	62.8
M9	3.59	88.5	9.35	157.0	0.54	62.0
M10	5.99	83.1	23.90	188.0	0.56	15.5

Note: The data in this table are based on five-year monitoring results.

(2) Seasonal variations of water quality

Table 3 gives average BOD and DO concentrations at the 10 monitored intersections in different seasons. It is indicated that water quality of the river varied significantly with season. In dry season, the average BOD concentrations at most of the interactions were over 5.0 mg/L; in level and dry seasons, the BOD levels dropped down significantly. The results demonstrate correlations between water quality and flow rate. Figure 3 presents the relationship between BOD levels and flow rates at the Manshui Bridge (M4). It shows that the BOD levels decreased when the flow rates increased.

3. Modeling Formulation

3.1. Identification of Modeling Approach

Many factors should be considered in identifying the modeling approach, such as data availability, methodology applicability, and desired level of detail for the modeling outputs. Several special features of the study river system are analyzed as follows:

(i) Previous studies on sediment transport indicated that the Yiluo River is in fact a sedimentational section of the entire river (Guan & Guo, 1985). During wet seasons, the river's flow rates could increase considerably, leading to sediment resuspension. Consequently, large amounts of biodegradable matters can be released from the sediment to the water, causing water-quality deterioration. It is desired that the developed model should be able to reflect these sedimentation-resuspension processes.

(ii) In the study river section, DO concentrations are significantly affected by daily and seasonal temperature variations. With raised temperature, the rates of organism metabolism and waste decomposition will rise accordingly, leading to increased oxygen demand; also, the raised temperature will result in reduced DO solubility in water. Thus, conditions of DO deficiency may occur frequently during summer months. At the same time, the warm season is also associated with high flows that provide more dilution capacity. The developed water quality model should be able to reflect this complexity.

(iii) In the study section, organic SS content affects water quality significantly. It is indicated that 54% of total discharged BOD at outlet D2 is from organic SS. Thereof, it is desired that the developed model be able to reflect the contribution from organic SS.

Based on the above considerations, the one-dimensional BOD-DO model (Dobbins, 1964) was developed for the study river. The general modeling formulation is as follows:

$$V \frac{dL}{dx} = -(K_1 + K_3)L \tag{1a}$$

$$V \frac{dC}{dx} = -K_1L + K_2(C_s - C) + K_4 \tag{1b}$$

where L is biochemical oxygen demand (BOD) (mg/L); C is dissolved oxygen level (DO) (mg/L); C_s is saturated DO concentration (mg/L); K_1 is oxygen consumption coefficient (day^{-1}); K_2 is oxygen recovery coefficient (day^{-1}); K_3 is a coefficient related to sedimentation, flocculation, scour, and resuspension of BOD (day^{-1}); K_4 is rate of oxygen production or consumption through photosynthesis or photorespiration ($\text{mg/L}\cdot\text{day}$); V is flow velocity (km/day); and x is distance (km).

Within a limited time interval, if variations of flow velocity are insignificant, V can be considered as a constant. Thus, letting $t = x/V$ represents the time for a parcel of water flowing over distance x , equation (1) can then be converted to:

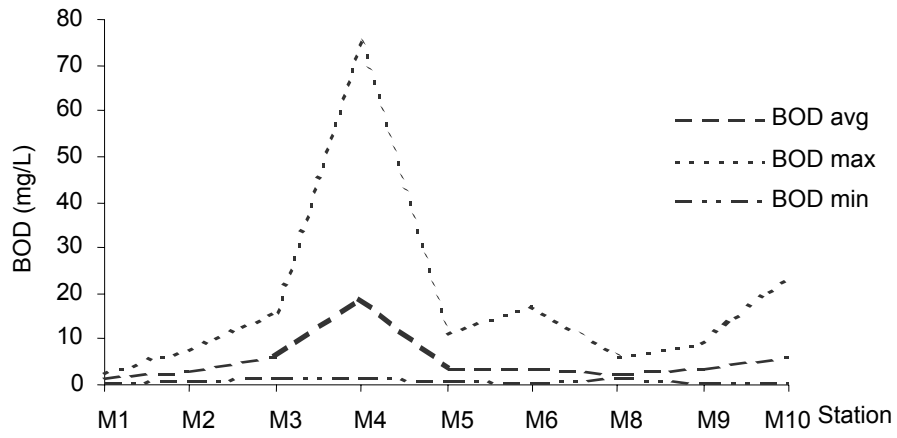


Figure 2. Variations of BOD concentrations along the Yiluo River.

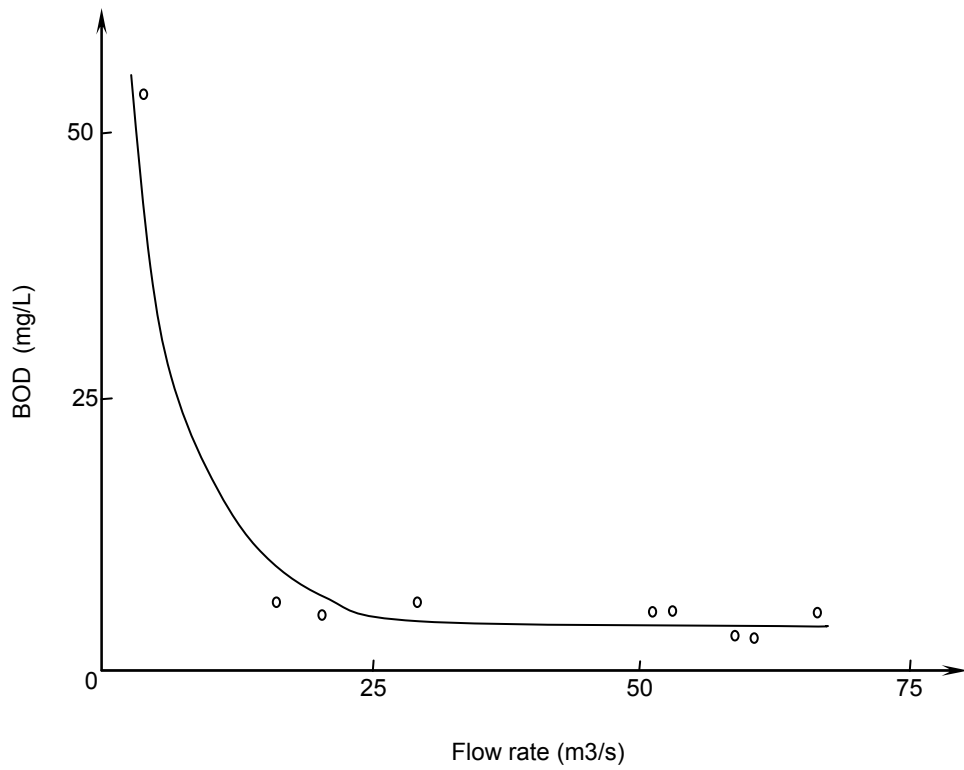


Figure 3. Relationship between BOD₅ concentrations and flow rates.

$$\frac{dL}{dt} = -(K_1 + K_3)L \quad (2a)$$

$$\frac{dC}{dt} = -K_1L + K_2(C_5 - C) + K_4 \quad (2b)$$

Given BOD and DO levels (i.e., L_0 and C_0) at the initial point ($t = 0$), solutions for L and C can then be obtained as follows:

$$L = L_0 e^{-(K_1 + K_3)t} \quad (3a)$$

$$C = C_5 + (C_0 - C_5)e^{-K_2t} + \frac{K_1 L_0}{K_1 + K_3 - K_2} [e^{-(K_1 + K_3)t} - e^{-K_2t}] + (1 - e^{-K_2t}) \frac{K_4}{K_2} \quad (3b)$$

Table 3. Average BOD Concentrations (mg/L) and DO Saturation Levels (%) in Different Seasons

Station	Dry Season		Level Season		Wet Season	
	BOD	DO	BOD	DO	BOD	DO
M1	1.79	5.6	1.52	83.6	1.49	93.7
M2	5.01	75.5	1.71	78.6	2.16	91.6
M3	10.37	54.8	3.83	79.7	2.37	96.5
M4	50.85	0	5.10	67.2	2.58	87.8
M5	5.60	93.3	2.83	64.6	2.29	84.1
M6	8.00	129.2	2.96	74.7	1.77	81.1
M8	4.69	110.0	2.04	64.9	1.53	81.6
M9	4.95	106.0	4.57	85.7	1.93	80.1
M10	9.54	75.9	7.30	92.5	2.35	81.5

Note: The data in this table are based on five-year monitoring results.

3.2. Formulation of Segmental Water-Quality Models

Due to variations of hydrologic and hydraulic conditions along the river, pollutant-loading and self-purification capacities also vary in different segments of the river. Thus, one uniform modeling formulation may not be sufficient for the entire river. Instead, the river should be divided into several relatively homogeneous segments; within each of the segments, each related parameter is assumed to have a uniform property.

The study river section (60 km long) was divided into 6 segments (including D1-D2, D2-D3, D3-Baimasi, D4-D6, D6-D7, and D7-D8), according to distribution of sewage outlets and variations of the river's hydrological and environmental conditions (Figure 4). A piecewise water quality model

was then initiated to reflect not only detailed hydrological and environmental characteristics of each segment but also interactions among different segments. Contaminant concentrations within each segment were assumed to be uniform. Thus, for two adjacent segments (as shown in Figure 5), a generalized mass balance expression for BOD and DO levels can be described as follows:

$$Q_i = Q_{i-1} + q_i \quad i = 1, 2, \dots, n \quad (4a)$$

$$L_i^0 = (L_{i-1}Q_{i-1} + l_i q_i) / Q_i \quad i = 1, 2, \dots, n \quad (4b)$$

$$C_i^0 = (C_{i-1}Q_{i-1} + c_i q_i) / Q_i \quad i = 1, 2, \dots, n \quad (4c)$$

where Q_i is water flow in segment i (m^3/s); q_i denotes wastewater loading to segment i (m^3/s); l_i and c_i are BOD and DO concentrations in wastewater discharged to segment i , respectively (g/m^3); L_i^0 and C_i^0 denote BOD and DO concentrations at the starting point of segment i , respectively (g/m^3); L_{i-1} and C_{i-1} are BOD and DO concentrations at the end of segment $i-1$, respectively (g/m^3). Thus, for segment i , we have the following BOD-DO models:

$$L_i = L_i^0 e^{-(K_{1i} + K_{3i})t_i} \quad (5a)$$

$$C_i = C_{si} + (C_i^0 - C_{si})e^{-K_{2i}t_i} + \frac{K_{4i}L_i^0}{K_{1i} + K_{3i} - K_{2i}} [e^{-(K_{1i} + K_{3i})t_i} - e^{-K_{2i}t_i}] + (1 - e^{-K_{2i}t_i}) \frac{K_{4i}}{K_{2i}} \quad (5b)$$

where L_i and C_i denote BOD and DO concentrations in segment i (mg/L); C_{si} is saturated DO concentration in segment i (mg/L); K_{1i} is oxygen-consumption coefficient in segment i (day^{-1}); K_{2i} is oxygen-recovery coefficient in segment i (day^{-1}); K_{3i} is deposition-resuspension coefficient in segment i (day^{-1}); K_{4i} is rate of oxygen production/consumption through photosynthesis and photorespiration in segment i ($mg/L \cdot day$); t_i is time for a parcel of water flowing through segment i (day).

3.3. Parameter Estimation

Models (5a) and (5b) are calibrated based on data monitored at each segment's starting and ending points. Totally, m sets of data regarding water quality, flow rate, and temperature in each segment were obtained through on-site monitoring programs. The objective of model calibration is to identify appropriate values for system parameters. This objective can be expressed as follows:

$$\Phi(K_{1i}, K_{2i}, K_{3i}, K_{4i}) = \frac{1}{2} \sum_{j=1}^m [\alpha (\bar{L}_{ij} - L_{ij})^2 + (1 - \alpha) (\bar{C}_{ij} - C_{ij})^2] \quad (6)$$

where α is a weighting parameter, $0 \leq \alpha \leq 1$; \bar{L}_{ij} and \bar{C}_{ij}

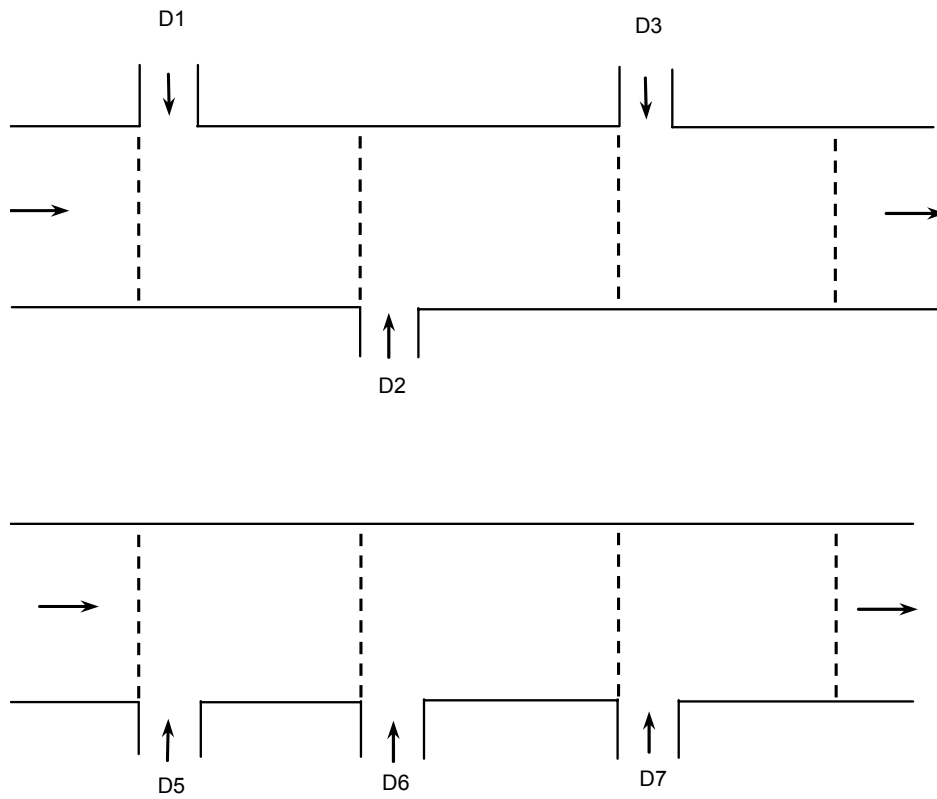


Figure 4. The conceptualized Yiluo River system.

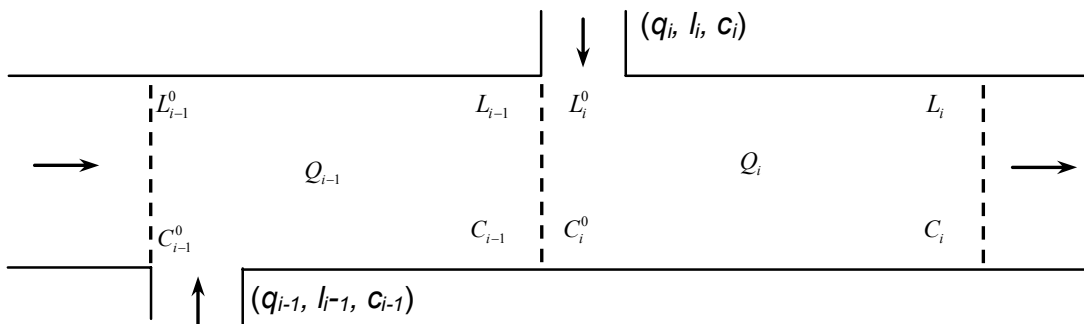


Figure 5. BOD-DO mass balance.

represent BOD and DO concentrations obtained from equations (5a) and (5b); L_{ij} and C_{ij} are observed BOD and DO concentrations in segment i at time j .

Let $\Phi(K_{1i}^*, K_{2i}^*, K_{3i}^*, K_{4i}^*) = \min \Phi(K_{1i}, K_{2i}, K_{3i}, K_{4i})$. The obtained K_{1i}^* , K_{2i}^* , K_{3i}^* and K_{4i}^* values are desired parameters for segment i under steady-state conditions.

Assume that flow velocities in different segments have insignificant variations in each given time interval, and can be approximated as a constant. Thus, the time required for a parcel of water passing a given segment is a constant. Therefore, equation (5) can be converted to:

$$L_i = A_i L_i^0 \tag{7a}$$

$$C_i - C_{si} = B_i L_i^0 + E_i (C_i^0 - C_{si}) + D_i \tag{7b}$$

where:

$$A_i = e^{-(K_{1i} + K_{3i})t_i} \tag{8a}$$

$$B_i = \frac{K_{1i}}{K_{1i} + K_{3i} - K_{2i}} (e^{-(K_{1i} + K_{3i})t_i} - e^{-K_{2i}t_i}) \tag{8b}$$

$$D_i = (1 - e^{-K_{2i}t_i}) \frac{K_{4i}}{K_{2i}} \tag{8c}$$

$$E_i = e^{-K_{2i}t_i} \tag{8d}$$

When parameters A_i , B_i , D_i and E_i are constants, equations (7a) and (7b) become linear functions. Thus, A_i , B_i , D_i and E_i can be estimated through linear regression, with the resulting K_{1i} , K_{2i} , K_{3i} and K_{4i} values being as follows:

$$K_{1i} = -\frac{B_i (\ln A_i - \ln E_i)}{(A_i - E_i)t_i} \tag{9a}$$

$$K_{2i} = -\frac{1}{t_i} \ln E_i \tag{9b}$$

$$K_{3i} = -\frac{1}{t_i} \ln A_i - K_{1i} \tag{9c}$$

$$K_{4i} = -\frac{K_{2i} D_i}{(1 - E_i)} \tag{9d}$$

Table 4 shows calibration results based on data of two monitoring programs. The resulting relative errors and residual standard deviations are relatively low.

Table 4. Average Relative Errors and Residual Standard Deviations for BOD and DO

Monitoring Program	Average Relative Error (r) (%)		Residual Standard Deviation (S) (mg/L)	
	BOD	DO	BOD	DO
MP1	47	7	0.96	0.44
MP2	27	2.	0.79	0.30
MP3	14	3	0.37	0.32

3.4. Dynamic Consideration

Most of water pollution problems are from the discharge of organic matters to water bodies as consequences of human activities. The capability of water bodies to purify themselves is an important factor that affects water quality simulation. This self-purification capacity is dependent on water temperature and flow rate. Flow rate determines pollutant transport time and dilution ratio, and temperature is related to DO solubility in water.

The Yiluo River region has a seasonal climate. Flow rates in wet seasons are significantly different from those in dry seasons. Water temperature also varies significantly between summer and winter. In the study river section, the monthly average water temperatures are between 2.1°C and 25.8°C, and the monthly average flow rates vary between 1.88 and 280 m³/s. To investigate relationships between water quality and flow rate as well as water temperature, a number of monitoring programs under different flow and temperature conditions were needed. In this study, over 40 field trips for monitoring water quality in the study river section in wet, dry and level seasons were undertaken. Data of water quality under different flow and temperature conditions were obtained. Parameters K_{1i} , K_{2i} , K_{3i} and K_{4i} were then estimated, as presented in Table 5. Based on the estimated parameters as well as the flow, temperature and water-quality data, a dynamic water quality model can be formulated with flow rate Q and water temperature T being variables. Thus, for a given segment i , parameters K_{1i} , K_{2i} , K_{3i} and K_{4i} can be expressed as functions of Q and T as follows:

$$K_{1i}(T_i) = a_{1i} a_{2i}^{(T_i - 20)} \tag{10a}$$

$$K_{2i}(T_i, Q_i) = a_{3i} Q_i^{a_{4i}} a_{5i}^{(T_i - 20)} \tag{10b}$$

$$K_{3i}(Q_i) = a_{6i} + a_{7i} Q_i^{-0.5} \tag{10c}$$

$$K_{4i}(T_i, Q_i) = a_{8i} + a_{9i} \frac{T_i}{Q_i} \tag{10d}$$

where a_{1i} , a_{2i} , a_{3i} , a_{4i} , a_{5i} , a_{6i} , a_{7i} , a_{8i} and a_{9i} are parameters to be estimated. Expressions for K_{1i} and K_{2i} [equations (10a) and

Table 5. Calibration Results for K_1 , K_2 , K_3 and K_4

Section		1	2	3	4	5	6
MP1	Water Temp (°C)	24.5	24.5	24.5	24.6	24.6	24.6
	Flow (m ³ /s)	55.2	55.2	55.2	76.9	76.9	76.9
	K_1	1.73	1.73	1.73	1.49	1.49	1.49
	K_2	1.28	1.28	1.28	6.04	6.04	6.04
	K_3	1.50	1.50	1.50	-0.23	-0.23	-0.23
	K_4	0.47	0.47	0.47	-8.10	-8.10	-8.10
MP2 (Phase 1)	Water Temp (°C)	24.2	26.6	28.2	26.8	28.6	27.7
	Flow (m ³ /s)	7.08	7.50	7.63	3.31	3.31	3.39
	K_1	3.85	2.14	2.01	4.26	5.14	6.40
	K_2	2.68	2.63	4.41	15.68	8.48	5.44
	K_3	6.24	0.75	3.61	-0.15	-1.74	-7.43
	K_4	1.10	1.67	33.08	3.37	27.04	34.90
MP2 (Phase 2)	Water Temp (°C)	10.1	15.0	17.2	15.1	16.1	15.9
	Flow (m ³ /s)	38.0	40.7	43.2	44.5	55.0	54.3
	K_1	0.02	1.02	0.78	3.16	1.48	5.02
	K_2	5.34	1.29	0.47	13.94	1.85	12.93
	K_3	4.93	2.39	-0.28	-0.41	2.25	4.60
	K_4	-0.08	5.21	-1.73	-16.14	1.06	-11.41
MP3	Water Temp (°C)	15.1	16.3	21.9	14.6	19.8	19.4
	Flow (m ³ /s)	16.1	17.2	22.3	18.3	31.0	31.1
	K_1	0.87	1.68	0.39	3.87	3.95	5.81
	K_2	4.32	0.09	8.93	6.86	4.59	3.43
	K_3	4.88	1.34	3.98	-3.59	-3.24	-7.50
	K_4	0.01	7.23	-28.70	-11.51	3.80	-0.01

(10b)] were reported in Thackston and Krenkel (1966) and Thomann (1982). In equation (10c), a_{6i} denotes variation rate of BOD concentrations due to sedimentation and resuspension. In equation (10d), T represents algae concentration which is a function of water temperature. Thus, based on the least square method, a_{1i} , a_{2i} , a_{3i} , a_{4i} , a_{5i} , a_{6i} , a_{7i} , a_{8i} and a_{9i} values in each segment can be estimated, as shown in Table 6.

4. Stochastic Forecasting System

In a natural river system, system state estimation is complicated by the fact that many hydrological and environmental parameters are uncertain and may be randomly disturbed by each other or by external factors. A general way to take into account these disturbances is to add some noise terms to the simulation model. However, the characteristics of

the noise are usually unknown, such that the system uncertainties are often simplified in the modeling efforts. This may lead to significant estimation errors. Thus, a more realistic method is desired for effectively reflecting impacts of random disturbances on BOD and DO concentrations.

Kalman filtering technique, which is a linear recursive scheme, is well suited for real-time estimation as needed in this study. Since the Yiluo River is a naturally-evolved stream system, major interference and disturbances from most of natural and human-made processes (e.g. water pollution) could be regarded as independent stochastic events; this satisfies the basic requirement for using the Kalman filtering technique. Real-time forecasting can then be conducted through updating the previous estimates based on renewed input and output information (Kalman, 1960; Luenberger, 1969; Kwakernaak & Sivan, 1972). The details of applying Kalman

filtering technique to establish a stochastic BOD-DO forecasting system are described as follows.

Table 6. Calibration Results for $a_1, a_2, a_3, a_4, a_5, a_6, a_7, a_8$ and a_9

Segment (i)	i = 1	i = 2	i = 3	i = 4	i = 5	i = 6
a_1	0.71	1.59	0.73	3.80	2.73	5.60
a_2	1.37	1.04	1.11	1.01	1.09	1.01
a_3	2.06	0.21	18.46	2.22	3.10	6.42
a_4	0.20	0.37	-0.72	0.69	0.03	0.01
a_5	1.01	1.19	1.07	1.17	1.12	1.09
a_6	-0.56	3.41	-1.15	3.42	1.72	4.81
a_7	18.84	-7.49	12.95	-29.58	-6.18	-22.42
a_8	0.66	0.37	10.28	2.00	3.01	5.38
a_9	-0.23	0.34	-4.95	-12.88	1.01	-8.78

4.1. State Estimation Equations

Let δ_{L_i} and δ_{C_i} be random variables, standing for errors of BOD and DO concentrations in segment i due to random disturbance, respectively. Both of them are assumed to have normal distributions [i.e. $N(0, \sqrt{\sigma_{L_i}})$ for δ_{L_i} and $N(0, \sqrt{\sigma_{C_i}})$ for δ_{C_i}]. Thus, the relevant covariance matrix (Q_i) can be defined as:

$$Q_i = \begin{bmatrix} \sigma_{L_i} & 0 \\ 0 & \sigma_{C_i} \end{bmatrix} \quad (11)$$

Based on mass balance Equations (4a) to (4c) and (7a) to (7b), water quality model (7) can be converted to:

$$L_{i+1} = \frac{Q_i}{Q_{i+1}} A_{i+1} L_i + \frac{q_{i+1}}{Q_{i+1}} A_{i+1} l_{i+1} + \delta_{L_{i+1}} \quad (12a)$$

$$C_{i+1} - C_{s, i+1} = \frac{Q_i}{Q_{i+1}} (B_{i+1} L_i + E_{i+1} C_i) + \frac{q_{i+1}}{Q_{i+1}} (B_{i+1} l_{i+1} + E_{i+1} c_i) - E_{i+1} C_{s, i+1} + D_{i+1} + \delta_{C_{i+1}} \quad (12b)$$

where L_{i+1} denotes BOD concentration in segment $i+1$; $C_{i+1} - C_{s, i+1}$ represents oxygen deficiency.

Let C_{i+1} represent $C_{i+1} - C_{s, i+1}$, we can then convert equations (12a) and (12b) into the following matrix format:

$$\begin{bmatrix} L_{i+1} \\ C_{i+1} \end{bmatrix} = \Phi_{i+1, i} \begin{bmatrix} L_i \\ C_i \end{bmatrix} + \begin{bmatrix} F_{L_{i+1}} \\ F_{C_{i+1}} \end{bmatrix} + \begin{bmatrix} \delta_{L_{i+1}} \\ \delta_{C_{i+1}} \end{bmatrix} \quad (13)$$

where

$$\Phi_{i+1, i} = \frac{Q_i}{Q_{i+1}} \begin{bmatrix} A_{i+1} & 0 \\ B_{i+1} & E_{i+1} \end{bmatrix} \quad (14a)$$

$$\begin{bmatrix} F_{L_{i+1}} \\ F_{C_{i+1}} \end{bmatrix} = \begin{bmatrix} \frac{q_{i+1}}{Q_{i+1}} A_{i+1} l_{i+1} \\ \frac{q_{i+1}}{Q_{i+1}} (B_{i+1} l_{i+1} + E_{i+1} c_{i+1}) - E_{i+1} C_{s, i+1} + D_{i+1} \end{bmatrix} \quad (14b)$$

Let V_{L_i} and V_{C_i} represent measurement errors for BOD and DO concentrations in segment i , respectively. They are assumed to have normal distributions with $N(0, \sqrt{r_{L_i}})$ for V_{L_i} and $N(0, \sqrt{r_{C_i}})$ for V_{C_i} . Their mean values equal zero, and the relevant covariance matrix is:

$$R_i = \begin{bmatrix} r_{L_i} & 0 \\ 0 & r_{C_i} \end{bmatrix}, \quad i = 1, 2, \dots, n \quad (15)$$

Thus, a state estimation equation that considers the measurement errors can be expressed as follows:

$$\begin{bmatrix} Z_{L_i} \\ Z_{C_i} \end{bmatrix} = \begin{bmatrix} L_i \\ C_i \end{bmatrix} + \begin{bmatrix} V_{L_i} \\ V_{C_i} \end{bmatrix}, \quad i = 1, 2, \dots, n \quad (16)$$

where $\begin{bmatrix} Z_{L_i} \\ Z_{C_i} \end{bmatrix}$ are observed BOD and DO concentrations in segment i ; $\begin{bmatrix} L_i \\ C_i \end{bmatrix}$ are real values of BOD and DO concentrations. Since equations (13) and (16) represent linear systems, the Kalman filtering technique can be employed to carry out system state estimation.

Firstly, let $\hat{L}_{i,i}$ and $\hat{C}_{i,i}$ represent estimated BOD and DO concentrations in segment i , based on the observed BOD and DO concentrations from segment 1 to i ; let $\hat{L}_{i+l,i}$ and $\hat{C}_{i+l,i}$ represent forecasted BOD and DO concentrations in segment $i+l$, based on the observed BOD and DO levels from the former i segments. Assume that the observed BOD and DO concentrations $\begin{bmatrix} L_0 \\ C_0 \end{bmatrix}$ at the reference segment exactly equal $\begin{bmatrix} L_{0,0} \\ C_{0,0} \end{bmatrix}$. Then, the recursive scheme based on the Kalman filtering technique can be described as follows:

(a) State estimation equation:

$$\begin{bmatrix} \hat{L}_{i+1, i} \\ \hat{C}_{i+1, i} \end{bmatrix} = \Phi_{i+1, i} \begin{bmatrix} \hat{L}_{i, i} \\ \hat{C}_{i, i} \end{bmatrix} + \begin{bmatrix} F_{L_{i+1}} \\ F_{C_{i+1}} \end{bmatrix} \quad (17)$$

(b) Covariance matrix of estimation errors:

$$P_{i+1, i} = \Phi_{i+1, i} P_{i, i} \Phi_{i+1, i}^T + Q_{i+1}, \quad (18)$$

(c) Gain matrix of the filter:

$$K_{i+1} = P_{i+1, i} [P_{i+1, i} + R_{i+1}]^{-1} \quad (19)$$

(d) State filtering equation:

$$\begin{bmatrix} \hat{L}_{i+1, i+1} \\ \hat{C}_{i+1, i+1} \end{bmatrix} = \begin{bmatrix} \hat{L}_{i+1, i} \\ \hat{C}_{i+1, i} \end{bmatrix} + K_{i+1} \left(\begin{bmatrix} Z_{L_{i+1}} \\ Z_{C_{i+1}} \end{bmatrix} - \begin{bmatrix} \hat{L}_{i+1, i} \\ \hat{C}_{i+1, i} \end{bmatrix} \right) \quad (20)$$

(e) Covariance matrix of filtering errors:

$$P_{i+1, i+1} = (I - K_{i+1}) P_{i+1, i} \quad (\text{where } I \text{ is a unit matrix}) \quad (21)$$

(f) Forecasting equation:

$$\begin{bmatrix} \hat{L}_{i+1, i} \\ \hat{C}_{i+1, i} \end{bmatrix} = \Phi_{i+1, i} \begin{bmatrix} \hat{L}_{i, i} \\ \hat{C}_{i, i} \end{bmatrix} + \sum_{k=1}^{i-1} \Phi_{i+1, i+k} \begin{bmatrix} F_{L_{i+k}} \\ F_{C_{i+k}} \end{bmatrix} + \begin{bmatrix} F_{L_{i+1}} \\ F_{C_{i+1}} \end{bmatrix} \quad (22)$$

where

$$\Phi_{i+1, i+k} = \prod_{j=k}^{i-1} \Phi_{i+j+1, i+j}, \quad i = 0, 1, \dots, n-1$$

Equations (17) to (22) form the stochastic water-quality forecasting system. Given $\begin{bmatrix} \hat{L}_{0,0} \\ \hat{C}_{0,0} \end{bmatrix}$, $P_{0,0}$, Q_i and R_i , optimal state estimates of BOD and DO concentrations for the study river section can then be obtained.

4.3. Self-Adaptive Technique for Automatic System Rectification

Since covariances σ_{L_i} and σ_{C_i} of random variables $\delta_{L(i)}$ and $\delta_{C(i)}$ can not be estimated precisely in advance, the Kalman filtering scheme cannot be constantly maintained at the optimal state. Therefore, an optimality test is required for automatic rectification of the forecasting system. In this study, a self-adaptive technique is used for approaching the desired optima.

Firstly, let array $\begin{bmatrix} v_L \\ v_C \end{bmatrix}$ represent the differences between observed and estimated BOD and DO levels:

$$\begin{bmatrix} v_{L_{i+1}} \\ v_{C_{i+1}} \end{bmatrix} = \begin{bmatrix} Z_{L_{i+1}} \\ Z_{C_{i+1}} \end{bmatrix} - \begin{bmatrix} \hat{L}_{i+1, i} \\ \hat{C}_{i+1, i} \end{bmatrix}, \quad i = 0, 1, \dots, n-1 \quad (23)$$

The operation status of a filtering scheme can then be examined based on this array and the covariance matrix of estimation errors (Q_i). The following are the details:

(1) Test and rectification of array expectation

According to Kalman (1960), when the filtering scheme is operated at the optimal state, we should have:

$$H_0 : E \left\{ \begin{bmatrix} v_L \\ v_C \end{bmatrix} \right\} = 0 \quad (24)$$

where $E \left\{ \begin{bmatrix} v_L \\ v_C \end{bmatrix} \right\}$ defines the expectation of array $\begin{bmatrix} v_L \\ v_C \end{bmatrix}$.

Thus, If $E \left\{ \begin{bmatrix} v_L \\ v_C \end{bmatrix} \right\} \neq 0$, it can be judged that the filtering scheme does not work optimally, and rectification to optimal status is required. A covariance matrix of $\begin{bmatrix} v_L \\ v_C \end{bmatrix}$ should then be established as follows:

$$\sum v_{i+1} = P_{i+1, i} + R_{i+1}, \quad i = 0, 1, \dots, n-1 \quad (25)$$

A statistic can be calculated:

$$\chi_{2n}^2 = \sum_{i=1}^n (v_{L_i}, v_{C_i}) (\sum v_{i+1})^{-1} \cdot \begin{bmatrix} v_{L_i} \\ v_{C_i} \end{bmatrix} \quad (26)$$

Since the study river section is divided into 3 segments in the upstream of Baimasi and another three in the downstream of Tazhuang, n should be equal to 3. If the significance level (α) is set as 0.05, χ_{α}^2 would be 12.592. Thus, if $\chi_{2n}^2 < \chi_{\alpha}^2 = 12.592$, the original assumption $H_0 : E \left\{ \begin{bmatrix} v_L \\ v_C \end{bmatrix} \right\} = 0$ can be accepted, and the filtering scheme is considered working at its optimal state. Otherwise, the initial values in $\begin{bmatrix} \hat{L}_{i,i} \\ \hat{C}_{i,i} \end{bmatrix}$ should be re-examined and rectified as follows.

Let:

$$\begin{bmatrix} \hat{L}_{i,i}^* \\ \hat{C}_{i,i}^* \end{bmatrix} = \begin{bmatrix} \hat{L}_{i,i} \\ \hat{C}_{i,i} \end{bmatrix} + \begin{bmatrix} \Delta \hat{L}_{i,i} \\ \Delta \hat{C}_{i,i} \end{bmatrix} \quad \forall i \quad (27)$$

where $\begin{bmatrix} \Delta \hat{L} \\ \Delta \hat{C} \end{bmatrix}$ denotes rectification amounts, and $\begin{bmatrix} \hat{L}^* \\ \hat{C}^* \end{bmatrix}$ denotes rectified initial values.

Thus, a new array can be obtained as follows:

$$\begin{bmatrix} v_{L_{i+1}}^* \\ v_{C_{i+1}}^* \end{bmatrix} = \begin{bmatrix} Z_{L_{i+1}} \\ Z_{C_{i+1}} \end{bmatrix} - \begin{bmatrix} \hat{L}_{i+1, i}^* \\ \hat{C}_{i+1, i}^* \end{bmatrix} \quad (28)$$

When the new array's expectation is zero, the filtering scheme is considered working properly.

(2) Test and rectification of covariance matrix $Q_{(i)}$

Define residual term in the l -th forecasting step as a l -dimensional vector:

$$\bar{d}_{i+l} = \begin{bmatrix} Z_{L_{i+l}} \\ Z_{C_{i+l}} \end{bmatrix} - \begin{bmatrix} \hat{L}_{i+l, i} \\ \hat{C}_{i+l, i} \end{bmatrix}, \quad i = 0, 1, \dots, n-1; i+1 \leq n \quad (29)$$

Let:

$$\bar{d}_{i,N} = \begin{bmatrix} \bar{d}_{i+1} \\ \bar{d}_{i+2} \\ \dots \\ \bar{d}_{i+N} \end{bmatrix} \quad i = 0, 1, \dots, n-1; i+1 \leq n \quad (30)$$

Define a $2N \times 2N$ matrix as follows:

$$W_{0i} = W_{0i}^{(1)} + W_{0i}^{(2)} \quad i = 0, 1, \dots, n-1 \quad (31)$$

where:

$$W_{0i}^{(1)} = W_{irs}^{(1)} \quad \forall i, r, s; \quad r \geq 1, s \leq N \quad (32)$$

$$W_{rs}^{(1)} = \Phi_{i+r, i} P_{i,i} \Phi_{i+s, i}^T + R_{i+r} \delta_{rs} \quad i = 0, 1, \dots, n-1; \forall r, s \quad (33)$$

$$\delta_{rs} = \begin{cases} 1 & (r = s) \\ 0 & (r \neq s) \end{cases} \quad \forall r, s \quad (34)$$

$$W_{0i}^{(2)} = W_{irs}^{(2)} \quad \forall i, r, s; \quad r \geq 1, s \leq N \quad (35)$$

$$W_{irs}^{(2)} = \sum_{j=i}^{i-1+\min(r,s)} \Phi_{i+r, j} Q_{0,j} \Phi_{i+s, j}^T \quad i = 0, 1, \dots, n-1; \forall r, s \quad (36)$$

$$\Phi_{i+r, i} = \prod_{j=1}^r \Phi_{i+j, i} \quad i = 0, 1, \dots, n-1; \forall r; \quad r \leq n-i \quad (37)$$

In (36), $Q_{0,j}$ represents initial covariance matrix for recursive estimation. Thus, a statistic for each i can be calculated as follows:

$$Y_i = \bar{d}_{i, N}^T W_{0i}^{-1} \bar{d}_{i, N} \quad \forall i \quad (38)$$

The above statistic has a χ^2 distribution with its degree of freedom being $2N$. If the significance level (α) is set as 0.10, pair $\chi_{1, \alpha/2}^2$ and $\chi_{2, \alpha/2}^2$ can be obtained. Table 7 shows acceptable ranges of the Y_i statistic. When $\chi_{1, \alpha/2}^2 \leq Y_i \leq \chi_{2, \alpha/2}^2$, the obtained $Q_{0(j+1)}$ is acceptable, such that further test and rectification are not required. Otherwise, further test

and rectification should be carried out as follows.

$$W_{0i} = \bar{d}_{i,N} \cdot \bar{d}_{i,N}^T \quad (39)$$

Based on equation (31), we have:

$$W_{0i}^{(2)} = \bar{d}_{i,N} \cdot \bar{d}_{i,N}^T - W_{0i}^{(1)} \quad i = 0, 1, 2, \dots, n-1 \quad (40)$$

The right-hand sides of equation (40) are independent of Q_i , while its left-hand sides are functions of Q_i . Thus, a linear equation group for Q_i can be obtained through comparing corresponding terms in the right- and left-hand sides of equation (40). Then, using the least square method, the linear equation group can be solved for obtaining estimations of Q_i , which represent the rectified covariance matrix of estimation errors.

Table 7. Acceptable Intervals of Y_i

N	Acceptable range of Y_i
3	$1.635 \leq Y_i \leq 12.592$
2	$0.711 \leq Y_i \leq 9.488$
1	$0.103 \leq Y_i \leq 5.991$

4.4. Result and Discussion

The developed forecasting system was used for estimating BOD and DO levels at the segments of Anlewo, Shifangyuan, and Baimasi. Two on-site monitoring programs (MP1 and MP2) were undertaken to observe BOD and DO concentrations, with the results being used for error analyses. A covariance matrix of measurement errors was established based on the sampling and laboratory-analysis techniques:

$$R = \begin{bmatrix} 0.05 & 0 \\ 0 & 0.01 \end{bmatrix}$$

The initial estimation of Q was set as:

$$Q = \begin{bmatrix} 0.1 & 0 \\ 0 & 0.1 \end{bmatrix}$$

With the self-adaptive technique as described in section 4.3, optimality of the filtering scheme is continuously tested and rectified for maintaining desired states. Analyses of relative errors between observed and forecasted (model-based and filter-based) BOD and DO concentrations were carried out for the segments of Anlewo (M2), Shifangyuan (M3), and Baimasi (M5). Data from two monitoring programs were used to verify the forecasting results; each monitoring program gener

Table 8. Relative Errors between Observed and Forecasted BOD Concentrations

No.	MP	Anlewo					Shifangyuan					Baimasi				
		State			Filter		State			Filter		State			Filter	
		OBS	MBF	RE (%)	FBF	RE (%)	OBS	MBF	RE (%)	FBF	RE (%)	OBS	MBF	RE (%)	FBF	RE (%)
1	MP11	2.38	1.292	45.7	2.329	2.1	4.00	4.192	4.8	4.009	0.2	2.96	3.114	5.2	2.971	0.4
2	MP12	2.20	1.985	9.6	2.189	0.5	3.26	4.090	25.4	3.302	1.3	3.28	2.807	14.4	3.247	1.0
3	MP13	1.86	1.650	30.6	1.849	0.6	3.76	3.844	2.2	3.746	0.1	3.26	3.008	7.7	3.243	0.5
4	MP21	1.02	1.749	71.5	1.051	3.0	3.98	2.953	10.3	3.927	1.3	2.70	2.700	0	2.700	0
5	MP22	1.56	1.657	6.2	1.563	0.2	4.00	3.325	16.9	3.965	0.9	2.60	2.717	4.5	2.608	0.3
6	MP23	1.22	1.749	43.4	1.242	1.8	3.98	3.092	22.3	3.934	1.2	2.50	2.704	8.2	2.514	0.6

Note: MP = monitoring program; OBS = observed values; MBF = model-based forecasted values; FBF = filter-based forecasted values; RE = relative error; MP11, MP12, and MP13 = samples 1, 2, and 3 in MP1, respectively; MP21, MP22, and MP23 = samples 1, 2, and 3 in MP2, respectively.

Table 9. Relative Errors between Observed and Forecasted DO Concentrations

No.	MP	Anlewo					Shifangyuan					Baimasi				
		State			Filter		State			Filter		State			Filter	
		OBS	MBF	RE (%)	FBF	RE (%)	OBS	MBF	RE (%)	FBF	RE (%)	OBS	MBF	RE (%)	FBF	RE (%)
1	MP11	7.63	8.365	9.6	7.648	0.2	7.54	6.960	7.7	7.509	0.4	5.69	5.489	3.5	5.689	0
2	MP12	7.79	8.310	6.7	7.800	0.1	7.94	7.219	9.1	7.902	0.5	5.51	5.576	1.2	5.510	0
3	MP13	7.93	8.406	6.0	7.939	0.1	7.81	7.465	4.4	7.792	0.2	5.46	5.616	2.9	5.461	0
4	MP21	7.27	7.837	7.8	7.281	0.1	7.06	7.372	4.4	7.076	0.2	5.61	5.130	8.6	5.609	0
5	MP22	7.41	7.792	5.2	7.417	0.1	7.07	7.431	5.1	7.089	0.3	5.59	5.132	8.2	5.589	0
6	MP23	7.47	7.913	5.9	7.472	0	7.20	7.611	5.7	7.222	0.3	5.68	5.157	9.2	5.679	0

Note: MP = monitoring program; OBS = observed values; MBF = model-based forecasted values; FBF = filter-based forecasted values; RE = relative error; MP11, MP12, and MP13 = samples 1, 2, and 3 in MP1, respectively; MP21, MP22, and MP23 = samples 1, 2, and 3 in MP2, respectively.

ates three samples for each segment. Three sets of data for observed and forecasted BOD and DO concentrations were examined, with the resulting relative errors being shown in Tables 8 and 9. The relative errors between observed (in MP1) and predicted (model-based) BOD concentrations for three samples in the Anlewo Segment are 45.7%, 9.6%, and 30.6%, with an average of 28.6%; in comparison, the errors between observed (in MP1) and predicted (filter-based) BOD concentrations are only 2.1%, 0.5%, and 0.6%, with an average of 1.1%. For samples obtained in MP2, the average error between observed and predicted (model-based) values is 40.4%, while that between observed and predicted (filter-based) values is 1.7%. Table 9 presents the result of error analysis for the predicted DO concentrations. The average errors between observed and predicted (model-based) DO concentrations in the Anlewo Segment are 7.4% and 6.3% for results of MP1 and MP2, respectively; and those between observed and predicted (filter-based) DO levels are 0.13% and 0.07% for results of MP1 and MP2, respectively. The results indicate that the filter-based approach can lead to much improved prediction accuracy. Similar phenomena can also be found for results of the other segments as shown in Tables 8 and 9. The results indicate that the Kalman filtering technique can effectively reflect the randomness of the study system, such that improved accuracy of water quality prediction can be achieved.

5. Conclusions

In this study, a stochastic water-quality forecasting system was developed for the Yiluo River, a tributary of the Yellow River with extremely high sediment and suspended-solid loadings. Extensive investigations of water quality in the river and the related pollution sources and watershed conditions were conducted. A modified Dobbins BOD-DO model was developed to simulate water quality in the river, with interrelationships among water quality and the related source and sink conditions being explicated. The developed model was calibrated through examination of data from historical records and specific field studies. A stochastic water-quality forecasting system was then developed to reflect random characteristics of many parameters, based on Kalman-filtering and self-adaptive techniques.

The developed system was used for predicting DO and BOD levels in the Yiluo River. The results indicated that randomness in many system parameters and their interactions had been effectively handled; the accuracy of state estimation was generally satisfactory. The modeling system is useful for regional water quality management. The resulting water quality predictions would provide decision support for the planning of related pollution abatement activities.

This study is a new attempt to develop a water quality forecasting system for northern China rivers where loadings of organic pollutants and suspended solids are extremely high and uncertainties exist in many system parameters. Further studies that incorporate techniques of fuzzy simulation and real-time process modeling would be helpful for more effec-

tively reflecting the system's uncertain and dynamic features and thus improving the forecasting accuracy.

Acknowledgments. This research has been supported by the Natural Sciences and Engineering Research Council of Canada.

References

- Beck, M.B. and Young, P.C. (1976). Systematic identification of DO-BOD model structure. *Environ. Eng.*, 120(EE5), 909-907.
- Belanger, T.V. (1980). Benthic oxygen demand in Lake Apopka Florida. *Water Res.*, 15, 267-274.
- Bobbie, J.E. and Tiwari, J.L. (1978). Ecosystem models vs biological reality: Experiences in the systems analysis of an Arctic pond. *Verh. Internat. Verein. Limnol.*, 20, 105-109.
- Dewey, R.J. (1984). Application of stochastic dissolved oxygen model. *J. Environ. Eng.*, 110(2), 412-429.
- Di Toro, D.M. and O'Connor, D.J. (1968). The distribution of dissolved oxygen in a stream with time varying velocity. *Water Resour. Res.*, 4, 639-646.
- Dobbins, W.E. (1964). BOD and oxygen relationships in streams, *J. San. Eng. Div., Proc.*, 90, 58-73.
- Fillos, J. and Swanson, W.R. (1975). The release rate of nutrients from river and lake sediments. *J. Water Pollut. Control Fed.*, 47, 1032-1042.
- Finney, B.A., Bowles, D.S. and Windham, M.P. (1982). Random differential equations in river water quality modeling. *Water Resour. Res.*, 18(1), 112-134.
- Kalman, R.E. (1960). A new approach to linear filtering and prediction problems. *Trans. ASME, Series D, J. Basic Eng.*, 32, 34-45.
- Kwakernaak, H. and Sivan, R. (1972). *Linear Optimal Control Systems*, John Wiley, New York.
- Leduc, R., Unny, T.E. and McBean, E.A. (1986). Stochastic model of first-order BOD kinetics. *Water Res.*, 20(5), 625-632.
- Loucks, D.P. and Lynn, W.R. (1966). Probabilistic models for predicting stream quality. *Water Resour. Res.*, 2(3), 593-605.
- Luenberger, D.G. (1969). *Optimization by Vector Space Method*, John Wiley, New York.
- McCutcheon, S.C. (1989). *Water Quality Modeling: Volume I, Transport and Surface Exchange in Rivers*, CRC Press, Boca Raton, Florida, USA.
- Brown, L.C. and Barnwell, T.O. (1987). *The Enhanced Stream Water Quality Models QUAL2E and QUAL2E-UNCAS: Documentation and Users Manual*, US Environmental Protection Agency, Georgia, USA.
- Orlob, G.T. (1992). Water quality modeling for decision making. *J. Water Resour. Plann. Manage.*, 118, 295-307.
- Ponambalam, K. and Curi, W.F. (1991). *Stochastic BOD-DO modeling revisited*, Technical Report No. 484-X-240791, Dept. of Systems Design Engineering, University of Waterloo, Canada.
- Rinaldi, S. and Soncini-Sessa, R. (1978). Sensitivity analysis of generalized Streeter-Phelps models. *Adv. Water Resour.*, 1, 141-146.
- Shastri, J.S., Fan, L.T. and Erickson, L.E. (1975). Nonlinear parameter estimation in water quality modeling. *J. Environ. Eng. Div.*, 99, 315-331.
- Shih, C.S. (1975). Stochastic water quality by simulation. *Water Res. Bull.*, 11(3), 256-266.
- Song, B.Q. and Brown, L.C. (1990). DO model uncertainty with correlated inputs. *J. Environ. Eng.*, 116(6), 1164-1180.
- Steeter, H.W. and Phelps, E.B. (1925). *A study on the pollution and natural purification of the Ohio River*, US Public Health Service, Public Health Bulletin, No. 146, Washington, DC, USA.

- Thackston, I.E. and Krenkel, P.A. (1966). *Longitudinal Mixing and Reaeration In Natural Streams*, Ph.D. Dissertation, Vanderbilt University, Nashville, TN, USA.
- Thomann, R.U. (1982). Verification of water quality models. *J. Environ. Eng. Div.*, 108(EE5), 932-910.
- Thomas, H.A. (1948). Pollution load capacity of streams. *Water Sewage Works*, 95, 405.
- Tiwaris, J.L., Hobbie, J.E., Reed, J.P., Stanley, D.W. and Miller, M.C. (1979). Some stochastic differential equations as models ecosystems: Monte Carlo simulation approach. *Math. Biosci.*, 28, 25-44.
- Tung, Y.K. and Hathorn, W.E. (1988). Assessment of probability distribution of dissolved oxygen deficit. *J. Environ. Eng.*, 114(6), 1421-1435.
- Young, P. and Beck, B. (1974). The modeling and control of water quality in a river system. *Automatica*, 10, 455-468.
- Zielinsky, P.A. (1989). Stochastic dissolved oxygen model. *J. Environ. Eng.*, 114(1), 74-90.